


# VITI AUTOFILETTANTI PER METALLI ZINCATE BIANCHE

Viti autofilettanti per metalli a testa cilindrica bombata

- A norma ISO 14585
- Impronta TX

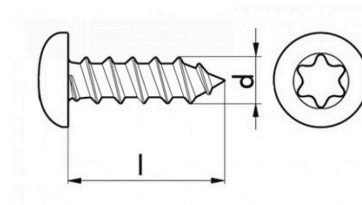

Ø	Lunghezza	Ø Testa	Impronta	Art.
2.9	65	5	tx 10	<b>F2115 29 65</b>
2.9	95	5	tx 10	<b>F2115 29 95</b>
3.5	16	7	tx 10	<b>F2115 35 16</b>
3.5	6.5	7	tx 10	<b>F2115 35 65</b>
3.5	9.5	7	tx 10	<b>F2115 35 95</b>
3.9	19	7.5	tx 15	<b>F2115 39 19</b>
3.9	25	7.5	tx 15	<b>F2115 39 25</b>
4.2	13	8	tx 20	<b>F2115 42 13</b>
4.2	16	8	tx 20	<b>F2115 42 16</b>
4.2	19	8	tx 20	<b>F2115 42 19</b>
4.2	32	8	tx 20	<b>F2115 42 32</b>
4.2	38	8	tx 20	<b>F2115 42 38</b>
4.2	9.5	8	tx 20	<b>F2115 42 95</b>
4.8	13	9.5	tx 25	<b>F2115 48 13</b>
4.8	16	9.5	tx 25	<b>F2115 48 16</b>
4.8	19	9.5	tx 25	<b>F2115 48 19</b>
4.8	22	9.5	tx 25	<b>F2115 48 22</b>
4.8	25	9.5	tx 25	<b>F2115 48 25</b>
4.8	32	9.5	tx 25	<b>F2115 48 32</b>
4.8	38	9.5	tx 25	<b>F2115 48 38</b>
4.8	45	9.5	tx 25	<b>F2115 48 45</b>
4.8	50	9.5	tx 25	<b>F2115 48 50</b>
4.8	60	9.5	tx 25	<b>F2115 48 60</b>
4.8	9.5	9.5	tx 25	<b>F2115 48 95</b>
5.5	16	11	tx 25	<b>F2115 55 16</b>
5.5	25	11	tx 25	<b>F2115 55 25</b>
6.3	16	12	tx 30	<b>F2115 63 16</b>
6.3	19	12	tx 30	<b>F2115 63 19</b>