


RONDELLE GREMBIALINA ZINCATE BIANCHE NORMFEST



Rondelle grembialina

- A norma DIN 522 C
- Durezza 100 HV
- In acciaio zincato bianco

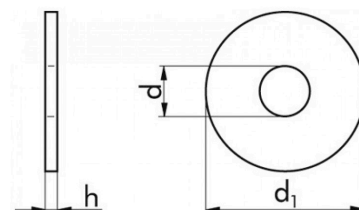


Per Ø Viti (M)	Ø Esterno	Ø Interno	H	Art.
4	12	4,3	1,25	N6411 4 12
4	20	4,3	1,25	N6411 4 20
5	15	5,3	1,25	N6411 5 15
5	20	5,3	1,25	N6411 5 20
5	25	5,2	1,25	N6411 5 25
5	30	5,3	1,25	N6411 5 30
6	15	6,4	1,5	N6411 6 15
6	18	6,4	1,5	N6411 6 18
6	20	6,4	1,25	N6411 6 20
6	20	6	2	N6411 6 202
6	30	6,4	1,25	N6411 6 30
6	40	6,5	1,5	N6411 6 40
6	25	6,5	1,25	N6411 6 25
8	20	8,5	1,25	N6411 8 20
8	24	8,4	3	N6411 8 243
8	25	5,4	1,5	N6411 8 25
8	25	8	2	N6411 8 252
8	30	8,4	1,5	N6411 8 30
8	40	8	2	N6411 8 40
8	40	8,4	3	N6411 8 403
10	30	10,5	1,5	N6411 10 30
10	30	10,5	3	N6411 10 303
10	40	10,5	2	N6411 10 40
10	25	10,5	1,5	N6411 10 25
10	20	10,5	1,5	N6411 10 20
12	32	13,5	1,5	N6411 12 30
12	40	12	2	N6411 12 40
12	40	13	4	N6411 12 404

RONDELLE GREMBIALINA ZINCATE BIANCHE
 NORMFEST



Rondelle grembialina

- A norma DIN 522 C
- Durezza 100 HV
- In acciaio zincato bianco

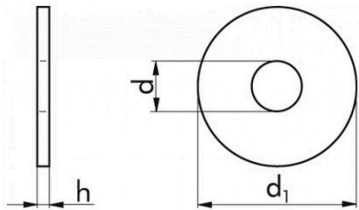

Per Ø Viti (M)	Ø Esterno	Ø Interno	H	Art.
12	50	13	2,5	N6411 12 50
14	30	15	1,5	N6411 14 30
14	40	15	2	N6411 14 40
14	40	15	4	N6411 14 404
16	40	16	2	N6411 16 40
16	42	16	4	N6411 16 404
16	50	17	4	N6411 16 50