


RIVETTI A STRAPPO IN ACCIAIO CHIDO IN ACCIAIO ZINCATO



Rivetti a strappo in acciaio

- A norma DIN 7337
- Occhiello e chiodo in acciaio zincato

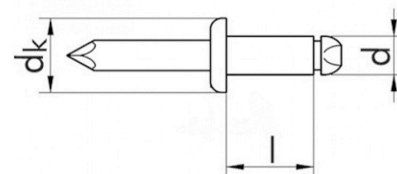


Ø	Lunghezza	Ø Testa	Ø Foro	D Per Ø Fune	Art.
3	6	6.5	3,1	1.3 - 3	F3945 3 6
3	8	6.5	3,1	3 - 5	F3945 3 8
3	10	6.5	3,1	5 - 7	F3945 3 10
3	12	6.5	3,1	7 - 9	F3945 3 12
3,2	6	6.5	3,3	0.5 - 3	F3945 32 6
3,2	8	6.5	3,3	3.5 - 5	F3945 32 8
3,2	10	6.5	3,3	5 - 7	F3945 32 10
3,2	12	6.5	3,3	7 - 9	F3945 32 12
3,2	16	6.5	3,3	11 - 12.5	F3945 32 16
4	6	8	4,1	0.5 - 2.5	F3945 39 6
4	8	8	4,1	2.5 - 5	F3945 39 9
4	10	8	4,1	4.5 - 6.5	F3945 39 10
4	12	8	4,1	6.5 - 8	F3945 39 11
4	14	8	4,1	7 - 10	F3945 39 14
4	16	8	4,1	8.5 - 12	F3945 39 16
4	20	8	4,1	12 - 16	F3945 39 20
4,8	8	9.5	5	2 - 4.5	F3945 49 8
4,8	10	9.5	5	4.5 - 6	F3945 49 10
4,8	12	9.5	5	6 - 8	F3945 49 12
4,8	14	9.5	5	8 - 9.5	F3945 49 14
4,8	16	9.5	5	8.5 - 12	F3945 49 16
4,8	20	9.5	5	13 - 15	F3945 49 20
4,8	25	9.5	5	15 - 20	F3945 49 25
5	8	9.5	5,1	1.5 - 4	F3945 5 8
5	10	9.5	5,1	4.5 - 6	F3945 5 10
5	12	9.5	5,1	6 - 8	F3945 5 12
5	14	9.5	5,1	8 - 9.5	F3945 5 14
5	16	9.5	5,1	9.5 - 11	F3945 5 16

RIVETTI A STRAPPO IN ACCIAIO CHIDO IN ACCIAIO ZINCATO



Rivetti a strappo in acciaio

- A norma DIN 7337
- Occhiello e chiodo in acciaio zincato

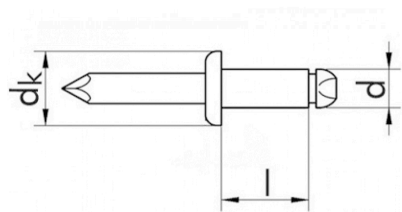

Ø	Lunghezza	Ø Testa	Ø Foro	D Per Ø Fune	Art.
5	20	9,5	5,1	11 - 15	F3945 5 20
5	25	9,5	5,1	15 - 20	F3945 5 25
5	30	9,5	5,1	20 - 25	F3945 5 30
6	10	12	6,1	2,5 - 4,5	F3945 58 10
6	16	12	6,1	8,5 - 10,5	F3945 58 16
6	18	12	6,1	9 - 12	F3945 58 18
6	22	12	6,1	10,5 - 14,5	F3945 58 22
6,4	18	13	6,5	9 - 11	F3945 64 18
6,4	20	13	6,5	11 - 13	F3945 64 20
6,4	25	13	6,5	13 - 17	F3945 64 25